

DESIGN NOTES

1. Design is based on the assumption that backfill within the reinforced soil mass, methods of construction and quality of materials conform to the requirements of Hilfiker Retaining Walls.

2. Assumed Soil Characteristics:

Wall Backfill:

Unit Weight: 120 pcf
Internal Friction Angle: 34°
Cohesion = 0 psf

Retained Backfill:

Unit Weight: 120 pcf
Internal Friction Angle: 30°
Cohesion = 0 psf

Foundation Soils:

Unit Weight: 120 pcf
Internal Friction Angle: 30°
Cohesion = 150 psf

Traffic Surcharge Loading (LL) = 240 psf
3. If during construction, the wall location, structure location or loads are different than that proposed in this plan set and calculation package, HRW shall be notified to evaluate the need for a redesign.

4. The design requires a non-saturated backfill. Surface and sub-surface drainage control may be required to prevent saturation of the backfill or relieve hydrostatic pressures.

5. Design Procedure:


Mechanically Stabilized Earth walls and Reinforced Soil Slopes, FHWA report No. FHWA-NHI-00-043.
6. All information hereon is derived from the reference drawings, and is subject to geometric and geotechnical confirmation. The applicable Hilfiker construction guide and specifications are an integral part of this submittal.

7. Hilfiker Retaining Walls shall be responsible only for the internal stability of the retaining wall, and not for global stability or foundation bearing capacity. The Owner shall be responsible for global stability and foundation competence. The Owner is responsible for all job site drainage, safety and fall protection provisions for workers in compliance with OSHA and any other applicable requirements.

Worst Case Applied Bearing Pressure by MSE Wall- @ 22' Height - 2850 psf.

If actual characteristics, grades or dimensions of soil materials differ from those listed above or shown on the plans, Hilfiker Retaining walls shall be notified to evaluate the need to redesign.

DATA, CONTACT
T THE DISTRICT OFFICE.

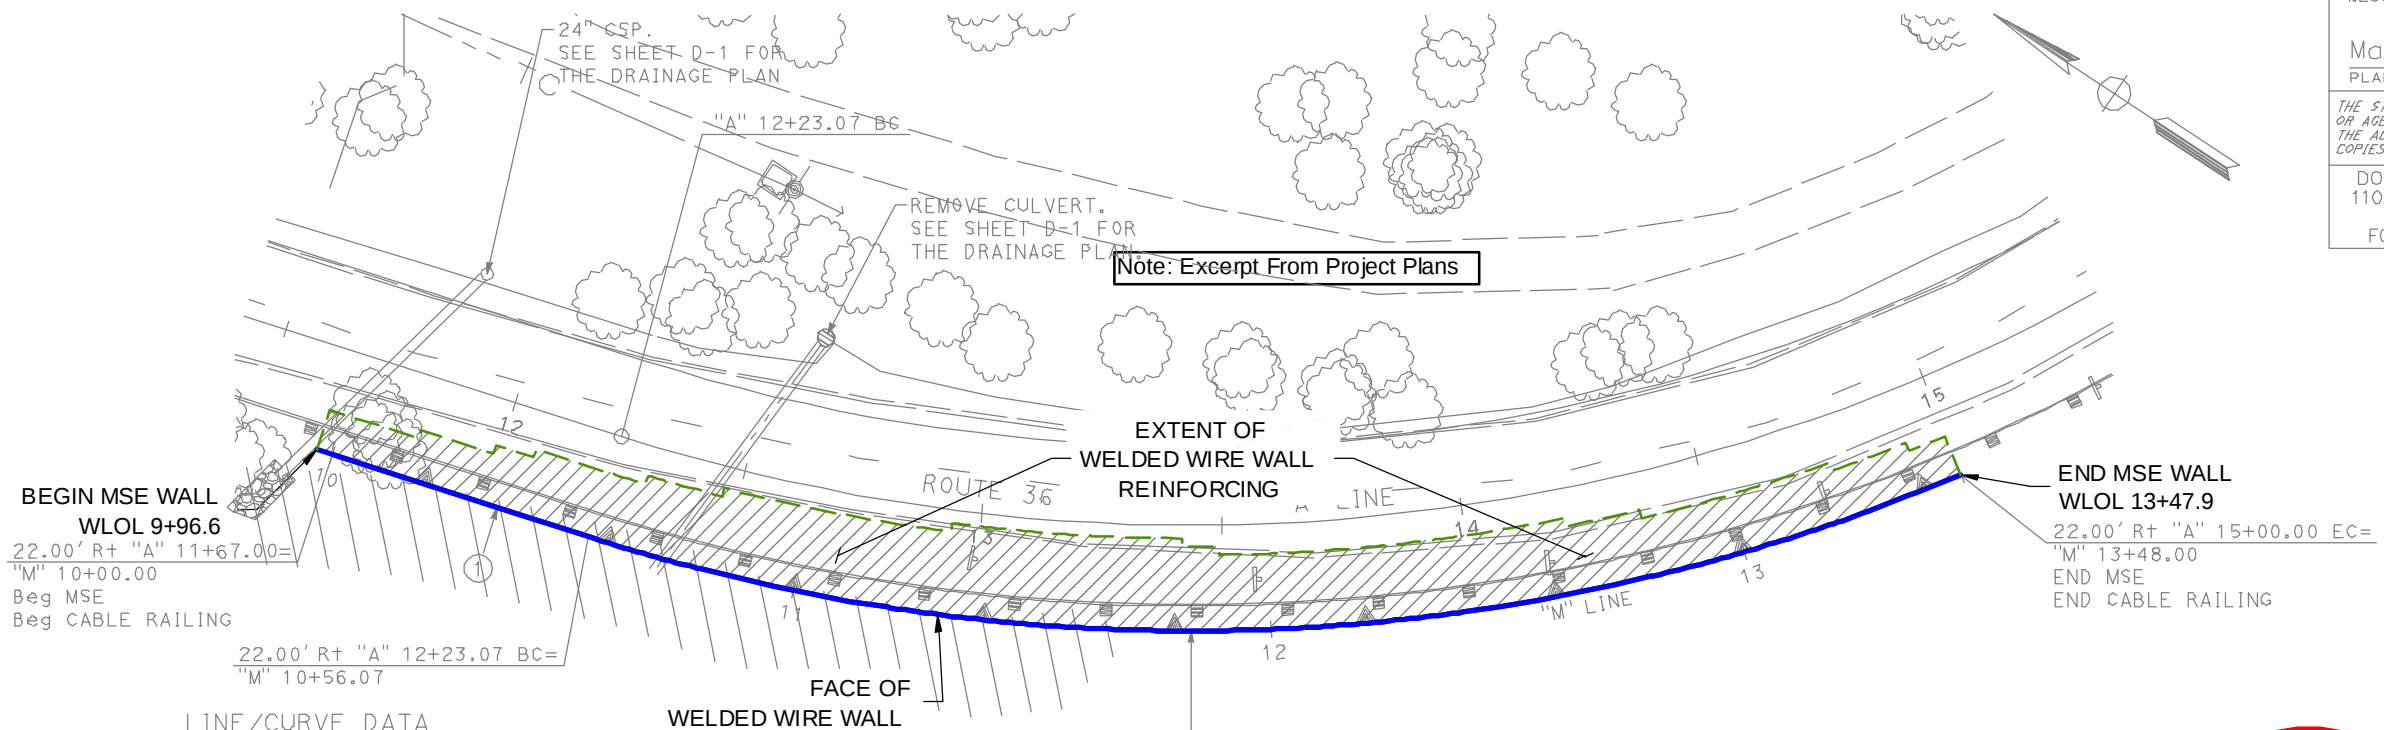

INSTALLED QUANTITIES:

WELDED WIRE WALL : 5856 FT²

LINE/CURVE DATA

No.	R	Δ	T	L
1	-	N15°46'57"W	-	56.07'
2	412.00'	39°9'46"	146.56'	293.93'

"M" PLAN
SCALE: 1"=20'

PLAN VIEW

SCALE: 1" = 40'

THE DESIGN CONTAINED ON THESE DRAWINGS IS BASED ON INFORMATION PROVIDED BY THE OWNER. ON THE BASIS OF THIS INFORMATION, THE HILFIKER COMPANY HAS DESIGNED, AND IS RESPONSIBLE FOR THE INTERNAL STABILITY OF THE STRUCTURE ONLY. EXTERNAL STABILITY, INCLUDING FOUNDATION AND SLOPE STABILITY, IS THE RESPONSIBILITY OF THE OWNER.



HW 210803AG

REV. NO.	DATE	BY	DESCRIPTION
	3-15-22	KLC	Initial .pdf Release

HILFIKER RETAINING WALLS

1902 Hilfiker Lane
Eureka, CA 95503-5711
TOLL-FREE 800.762.8962
PH 707.443.5093 FAX 707.443.2891
WEB SITE www.hilfiker.com E-MAIL info@hilfiker.com


CESARETTI
Engineered
Solutions
CIVIL ENGINEERING SPECIALISTS

P.O. Box 132
Fortuna, CA 95540
Phone (707) 725-CESR
(707) 498-7193
CesarettiEngineered.com
KCesaretti@att.net


CALTRANS 01-0F1604

MSE WELDED WIRE WALL
PLAN VIEW & GENERAL NOTES


PROJECT	22-009
DATE	3-15-22
DESIGN	KLC
DRAWN	KLC
SHT	1 OF 4

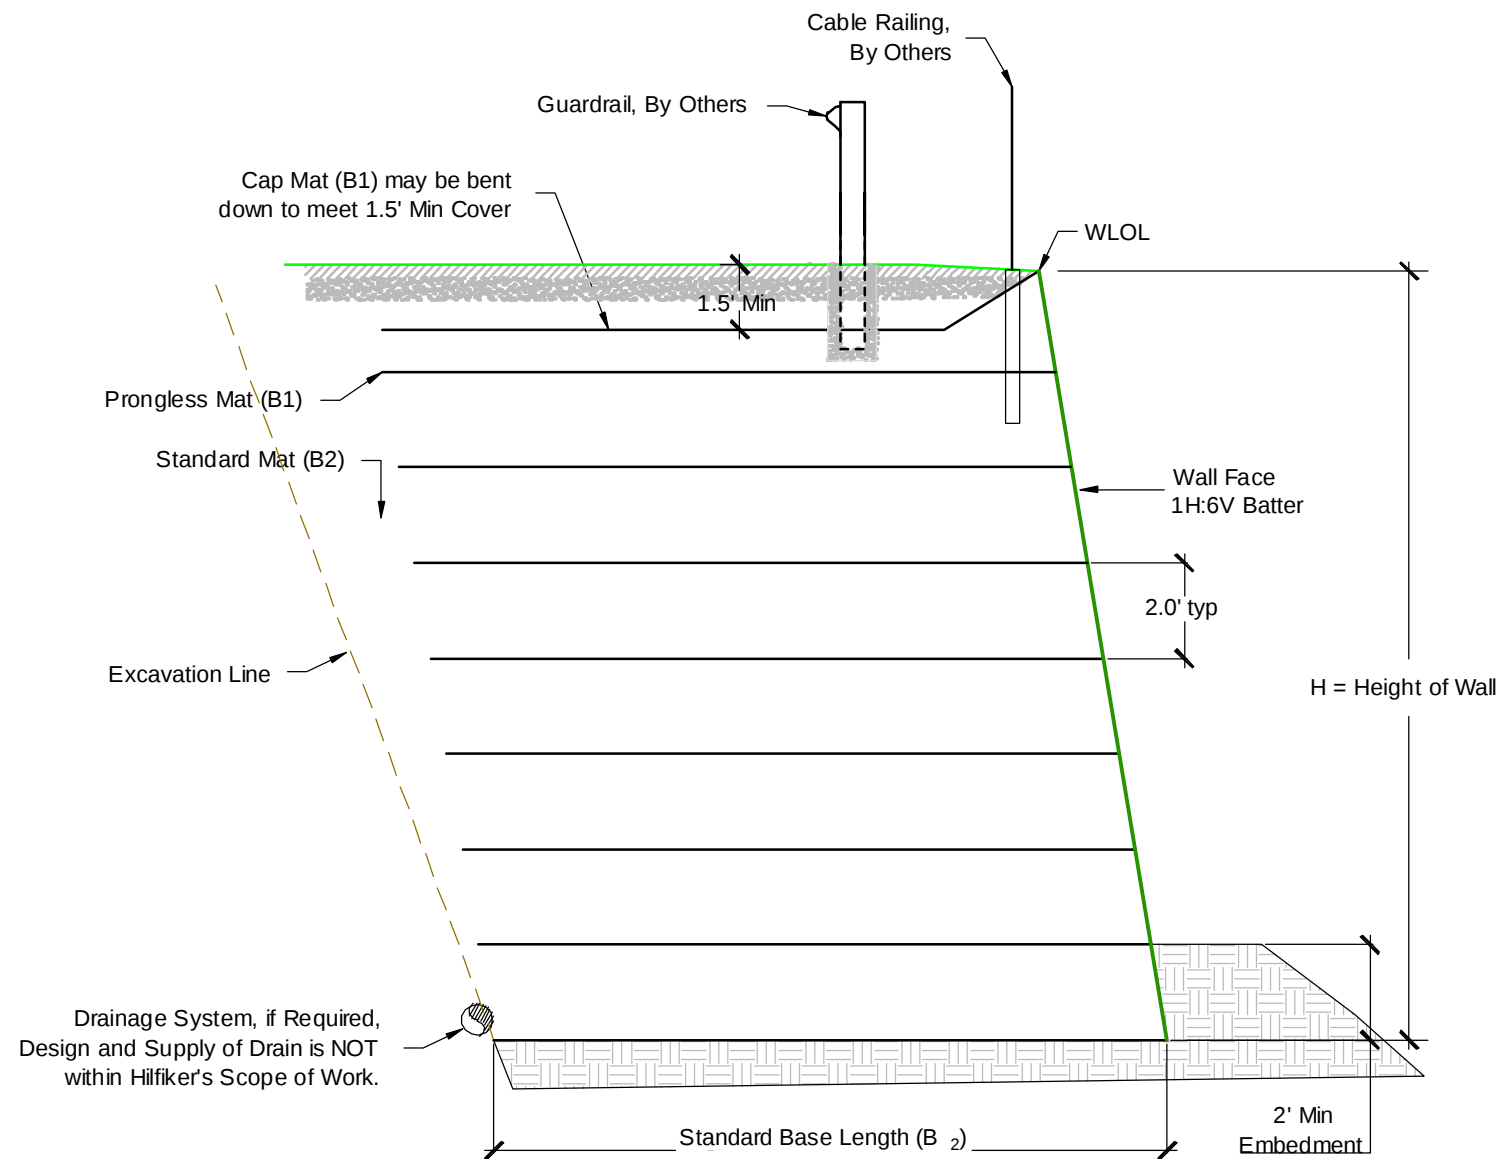

CROSS SECTION, TYP
SCALE: 1" = 4'

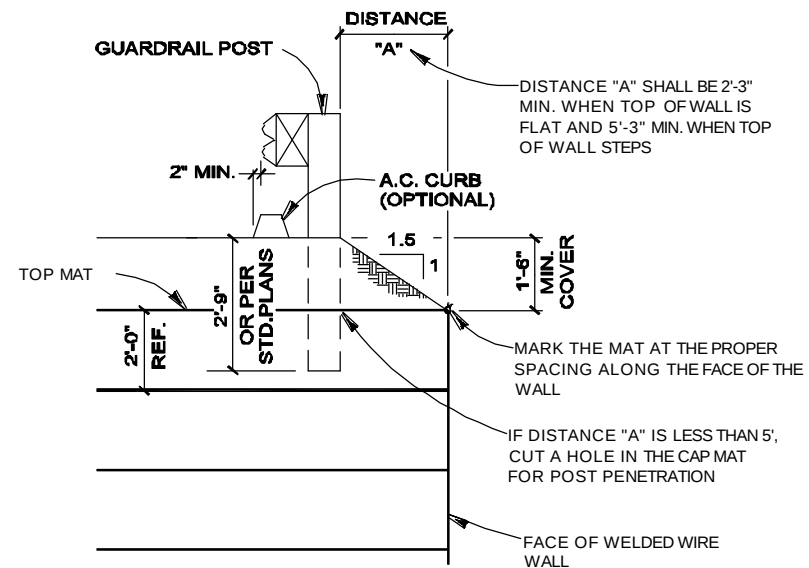

SECTION
GUARDRAIL DETAIL
NOT TO SCALE
(FENCE DETAIL SIMILAR)

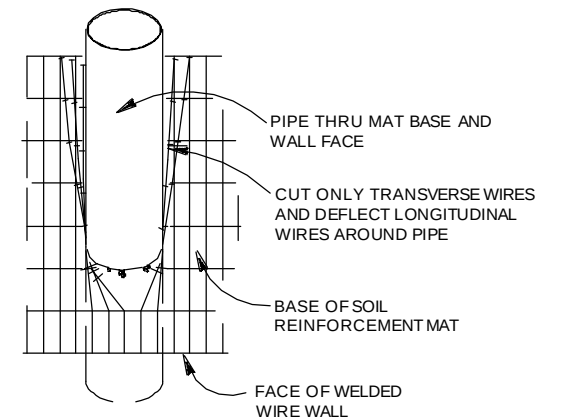


PLAN VIEW
PIPE OR SLEEVE PENETRATION
NOT TO SCALE

AT THE UPPER SURFACE OF THE CULVERT, CUT THE TRANSVERSE WIRES ONLY. BEND AND LIFT THE LONGITUDINAL WIRES IN THE BASE OF THE MAT TO FIT AGAINST THE SIDE OF THE CULVERT

AT THE LOWER SURFACE OF THE CULVERT, CUT THE TRANSVERSE WIRES ONLY IN THE MAT FACE. BEND THE LONGITUDINAL WIRES BACK TO FIT AGAINST THE CURVE OF THE CULVERT

NOTE: BACKING MATS AND FILTER FABRIC (NOT SHOWN) ARE TO BE CUT OFF FLUSH WITH THE SIDES OF THE CULVERT

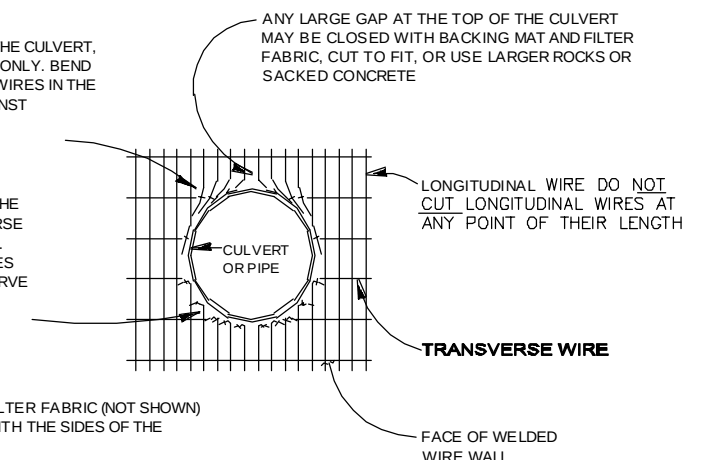

ELEVATION
CULVERT THRU WALL FACE
NOT TO SCALE

THE DESIGN CONTAINED ON THESE DRAWINGS IS BASED ON INFORMATION PROVIDED BY THE OWNER. ON THE BASIS OF THIS INFORMATION, THE HILFIKER COMPANY HAS DESIGNED, AND IS RESPONSIBLE FOR THE INTERNAL STABILITY OF THE STRUCTURE ONLY. EXTERNAL STABILITY, INCLUDING FOUNDATION AND SLOPE STABILITY, IS THE RESPONSIBILITY OF THE OWNER.

REV. NO.	DATE	BY	DESCRIPTION
	3-15-22	KLC	Initial .pdf Release

HILFIKER RETAINING WALLS

HW

1902 Hilfiker Lane
Eureka, CA 95503-5711
TOLL-FREE 800.762.8962
PH 707.443.5093 FAX 707.443.2891
WEB SITE www.hilfiker.com E-MAIL info@hilfiker.com

1902

CESARETTI

Engineered Solutions

CIVIL ENGINEERING SPECIALISTS

P.O. Box 132
Fortuna, CA 95540
Phone (707) 725-CESR
(707) 498-7193
CesarettiEngineered.com
KCesaretti@att.net

CALTRANS 01-0F1604

MSE WELDED WIRE WALL
CROSS SECTION & DETAILS

HW 210803AG


PROJECT	22-009
DATE	3-15-22
DESIGN	KLC
DRAWN	KLC

SHT **3** OF 4



STEP 1


PLACE THE FIRST COURSE OF SOIL REINFORCEMENT MATS ON PREPARED FOUNDATION

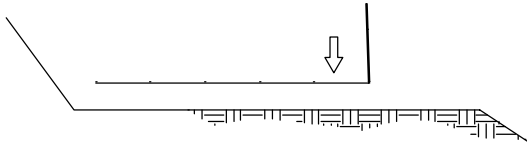

STEP 2

PLACE THE BACKING MAT AGAINST THE INSIDE FACE OF THE SOIL REINFORCEMENT MAT. CLIP THE SECOND-TO-TOP TRANSVERSE WIRE ON THE BACKING MAT TO THE TOP TRANSVERSE WIRE ON THE SOIL REINFORCEMENT MAT.


INSTALL CONTINUOUS MIRAMESH CLOTH, HOG-RING TO THE TOP WIRE ON THE BACKING MAT.

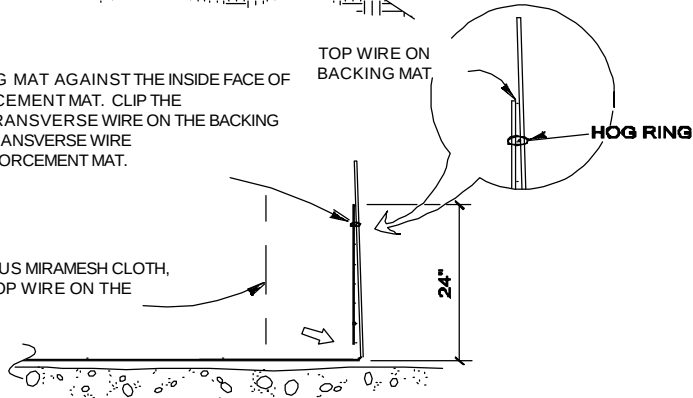

STEP 3

PLACE AND COMPACT THE BACKFILL IN LAYERS AND DENSITIES AS SPECIFIED IN THE PROJECT PLANS. LEAVE A VOID AT THE FACE AS SHOWN.


PLACE THE SECOND COURSE OF SOIL REINFORCEMENT MATS WITH THE BASE LONGITUDINAL WIRES RESTING ON THE TOP TRANSVERSE WIRE OF THE BACKING MAT BELOW. SLIDE THE SOIL REINFORCEMENT MAT INTO ALIGNMENT.

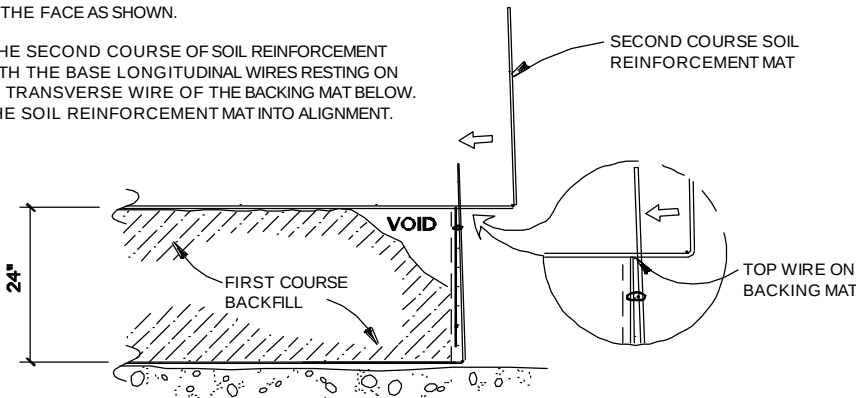

CONSTRUCTION SEQUENCE
NOT TO SCALE



STEP 4

HOG THE BOTTOM TRANSVERSE WIRE OF THE BACKING MAT OVER THE VERTICAL PRONGS ON THE LOWER MAT. ROTATE THE BACKING MAT TO VERTICAL AND CLIP THE SECOND-TO-TOP TRANSVERSE WIRE ON THE BACKING MAT TO THE TOP WIRE ON THE SOIL REINFORCEMENT MAT.

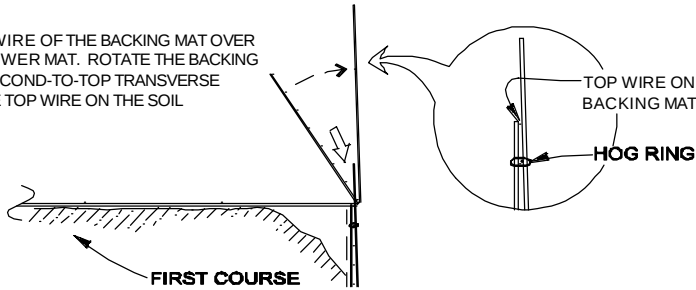

STEP 5



INSTALL THE CONTINUOUS MIRAMESH CLOTH. PLACE AND COMPACT THE BACKFILL TO THE BASE ELEVATION OF THE NEXT MAT. REPEAT STEPS 3 THROUGH 5 TO THE TOP LIFT.

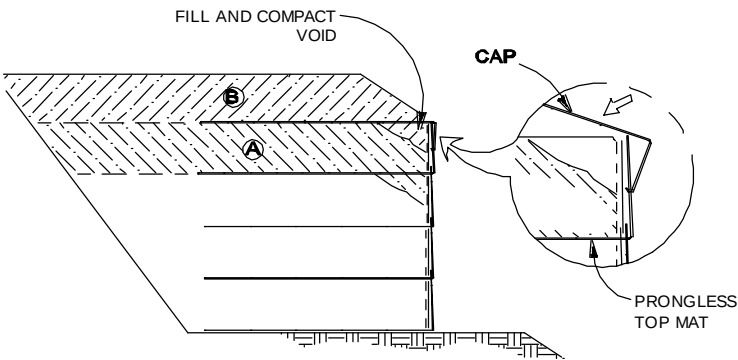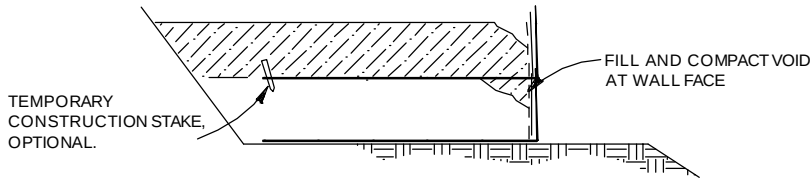


STEP 6: TOP LIFT

PLACE THE TOP LIFT PRONGLESS MAT, BACKING MAT AND CONTINUOUS MIRAMESH CLOTH. PLACE AND COMPACT BACKFILL IN AREA "A". HOOK THE CAP OVER THE MIDDLE TRANSVERSE WIRE ON THE PRONGLESS MAT, AND ROTATE INTO PLACE. BACKFILL "B" TO 1'-6" MIN. COVER OVER THE CAP.

WALL COMPONENTS
NOT TO SCALE

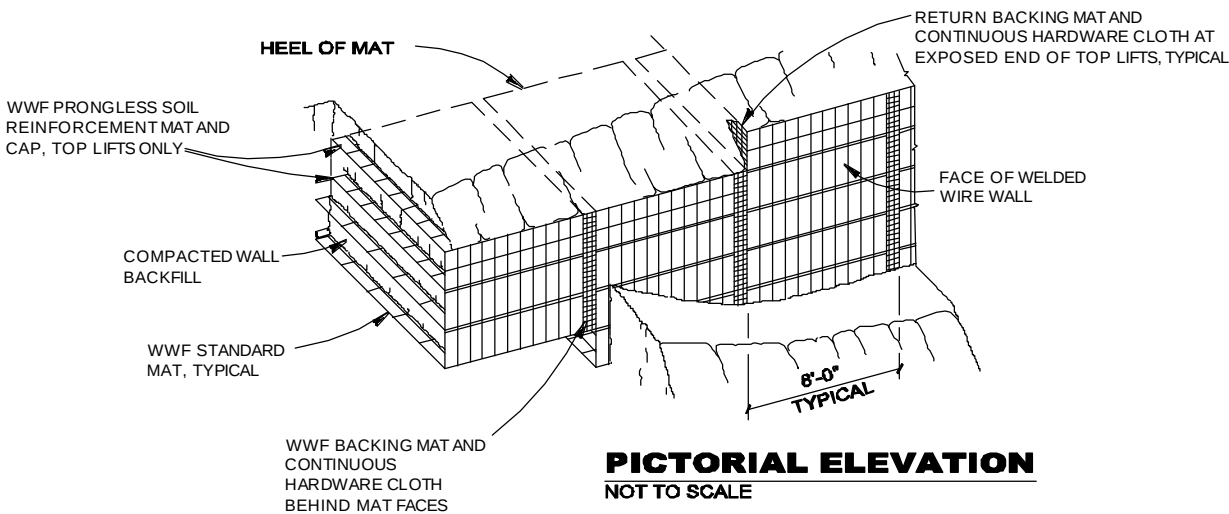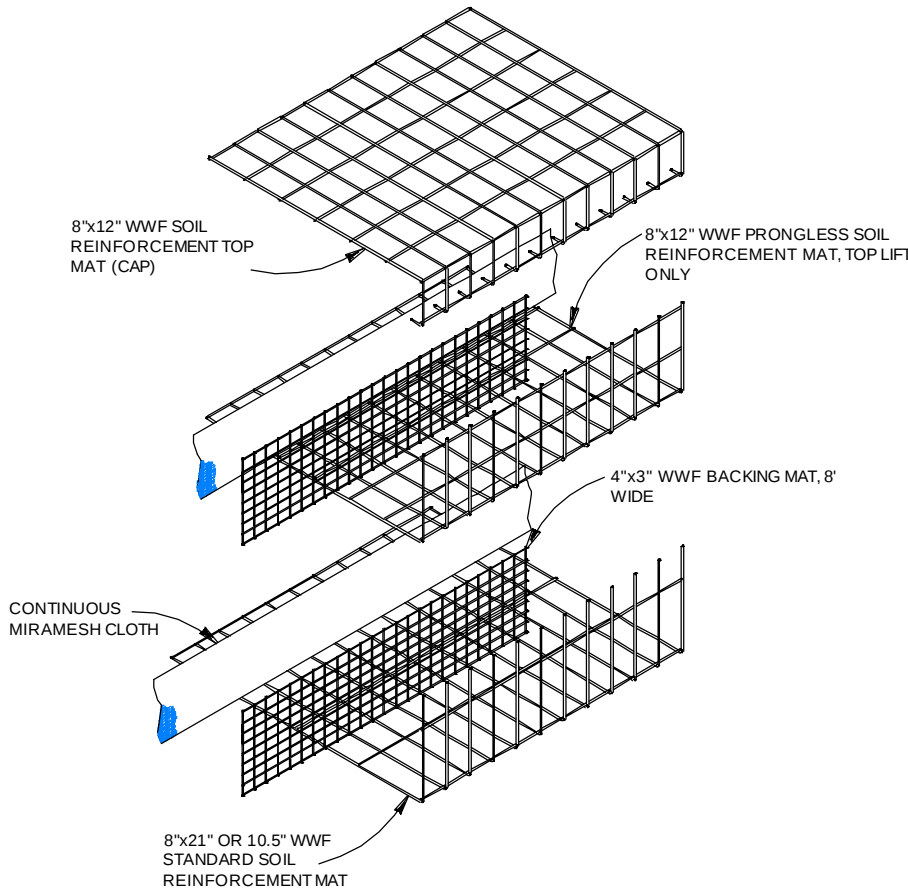

PICTORIAL ELEVATION
NOT TO SCALE

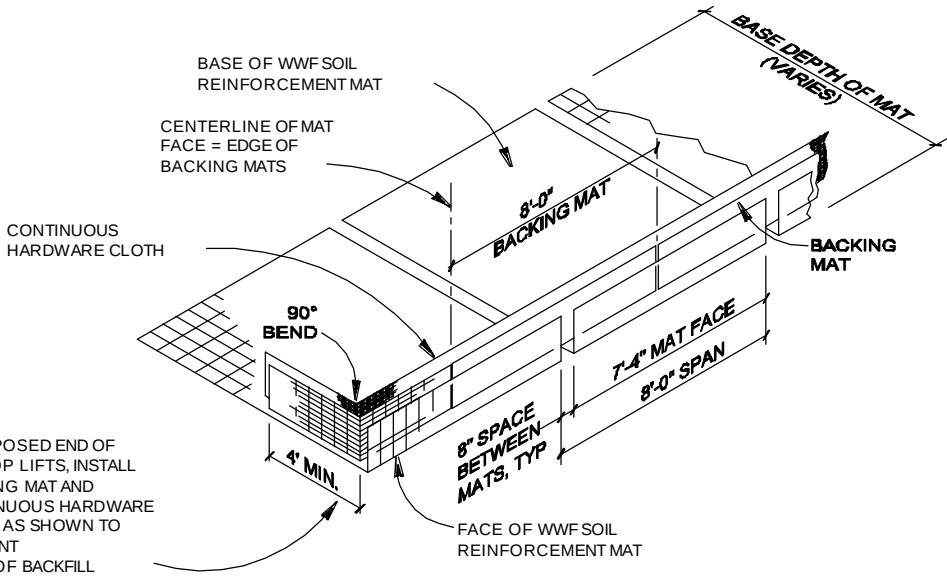

ISOMETRIC VIEW
WELDED WIRE WALL COMPONENTS WITH RETURN MAT
NOT TO SCALE

THE DESIGN CONTAINED ON THESE DRAWINGS IS BASED ON INFORMATION PROVIDED BY THE OWNER. ON THE BASIS OF THIS INFORMATION, THE HILFIKER COMPANY HAS DESIGNED, AND IS RESPONSIBLE FOR THE INTERNAL STABILITY OF THE STRUCTURE ONLY. EXTERNAL STABILITY, INCLUDING FOUNDATION AND SLOPE STABILITY, IS THE RESPONSIBILITY OF THE OWNER.

HILFIKER RETAINING WALLS

HW

1902 Hilfi Lane
Eureka, CA 95503-5711
TOLL-FREE 800.762.8962
PH 707.443.5093 FAX 707.443.2891
WEB SITE www.hilfi.com E-MAIL info@hilfi.com

1902

CESARETTI

Engineered Solutions

CIVIL ENGINEERING SPECIALISTS

P.O. Box 132
Fortuna, CA 95540
Phone (707) 725-CESR
(707) 498-7193
CesarettiEngineered.com
KCesaretti@att.net

CALTRANS 01-0F1604

MSE WELDED WIRE WALL
CONSTRUCTION SEQUENCE &
DETAILS



HW 210803AG

PROJECT	22-009
DATE	3-15-22
DESIGN	KLC
DRAWN	KLC

SHT 4 OF 4